

SERVICE

MANUAL

PUBLIC ADDRESS CASSETTE

RECEIVER

PA-9100RC/9200RC

interM

ELECTRICAL PARTS LIST

Ref No.	Part No.	Description	Value
POWER AMP B'D (4005106000)			
Q112 Q118	2008606104 - T	TR NPN KTC 3198Y	KTC 3198Y
Q113	2008606105 - T	TR PNP KTA 1266Y	KTA1266Y
Q101 - 104 Q109	2008606108 - T	TR NPN KTC2240BL (KTC 3200BL)	KTC3200BL
Q111	2028107115	TR PNP 2SA968Y	KTA968A
Q116 - 117	2028107118	TR PNP 2SA1302(0) 2SA1943	2SA 1943
Q105 - 106	2028107984	TR PNP 2SA 1306A(Y),KTA1659A(Y)	KTA 1659
Q105 - 106(for PA - 9100RC)	2008206998 - T	KTA1023 - Y - AT	KTA1023Y
Q110	2028407118	TR NPN 2SC 2238Y	KTC2238A
Q114 - 115	2028407122	TR NPN 2SC3281.0/WACC 2SC5200	2SC5200
Q107 - 108	2028407990	TR NPN 2SC 3298A(Y),KTC4370A(Y)	KTC4370
Q107 - 108(for PA - 9100RC)	2008407970 - T	KTC1027 - Y - AT	KTC1027
D101 - 102	2058010101	DIODE IN 60	1N60
D111	2058100988	DIODE BRIDGE PBU 804	PBU 804
D109	2058100996	DIODE RECTIFIER LT1N4006(4007)	1N 4006
D104 - 105 D106A D107 - 108 D103A	2058304100	DIODE IN4148	1N 4148
D110	2058502240	DIODE ZENER UZ - 24BM(23.1,25.5)	UZ 24BM
IC101A	2118050410	IC TA7317P TOSHIBA	TA7317P
R109A R110A	3009102973	RES CF 1K 1/5W J N	1K
R107A R111B R112B	3009103973	RES CF 10K 1/5W J N	10K
R142 R148	3009104973	RES CF 100K 1/5W J N	100K
R118	3009122973	RES CF 1.2K 1/5W J N	1.2K
R119 R101A	3009152973	RES CF 1.5K 1/5W J N	1.5K
R143 R103B	3009153973	RES CF 15K 1/5W J N	15K
R134	3009154973	RES CF 150K 1/5W J N	150K
R417	3009183973	RES CF 18K 1/5W J N	18K
R140	3009203973	RES CF 20K 1/5W J N	20K
R138	3009204973	RES CF 200K 1/5W J	200K
R120 - 121	3009221973	RES CF 220 1/5W J N	220
R151A	3009222973	RES CF 2.2K 1/5W J N	2.2K
R149 R102A	3009223973	RES CF 22K 1/5W J N	22K
R149(for PA - 9100RC)	3009392973	RES CF 3.9K 1/5W J N	3.9K
R139	3009224973	RES CF 220K 1/5W J N	220K
R104A R105A	3009271973	RES CF 270 1/5W J N	270
R115 R137	3009273973	RES CF 27K 1/5W J N	27K

R115(for PA-9100RC)	3009203973	RES CF 20K 1/5W J N	20K
R145	3009333973	RES CF 33K 1/5W J N	33K
R144	3009472973	RES CF 4.7K 1/5W J N	4.7K
R136 R150 R108A	3009473973	RES CF 47K 1/5W J N	47K
R123-124	3009562973	RES CF 5.6K 1/5W J N	5.6K
R123-124(for PA-9100RC)	3009392973	RES CF 3.9K 1/5W J N	3.9K
R135 R146	3009563973	RES CF 56K 1/5W J N	56K
R116	3009680973	RES CF 68 1/5W J N	68
R125-128 R114B	3009821973	RES CF 820 1/5W J N	820
R117	3039102572-F	RES MO 1K 2W J N	1K 2W
R103A R106A	3039153575-T	RES MO 15K 2W	15K 2W
R122	3039271472-T	RES MO 270 1W J T	270 1W
R133	3039560572-F	RES MO 56 2W J N	56 2W
R141	3059152784	RES CE 1.5K 5W JN #2	1.5K 5W
R141(for PA-9100RC)	3039102572-F	RES MO 1K 2W J N	1K 2W
R129-132	3059478783	RES CE 0.47 5W J T	0.47 5W
SVR101-102	3248347120-T	SES SEMI 470 N6L25T1N	471
C114	3408247131	CAP RSA 470UF 16V SNAP 10 P	470/16
C111-112 C116	3409210071-T	CAP AF RSG 10UF 50V 5 P	10/50
C118 C102B C119	3409210971-T	CAP AF RSG 1UF 50V 5 P	1/50
C119(for PA-9100RC)	3409247871-T	CAP AF RSG 0.47UF 50V 5 P	0.47/50
C115	3409222071-T	CAP AF RSG 22UF 50V 5 P	22/50
C106A	3409233971-T	CAP AF RSG 3.3UF 50V 5 P	3.3/50
C105A	3409247071-T	CAP AF RSG 47UF 50V 6 P	47/50
C117	3409247871-T	CAP AF RSG 0.47UF 50V 5 P	0.47/50
C103A	3409847041-T	CAP AF NP 47UF25V 8 P	47/25 NP
C120-121 C120-121(for PA-9100RC)	3419068208 3409247280	CAP AF HM 6800UF 80V 35 P LUG CAP LSW472M1JP30M(4700UF/63V)	6800/80 4700/63
C110 C107A C108A	3509101130-T	CAP CE SL 100PF 50V J	100P
C109	3509102530-T	CAP CE B 0.001UF 50V J	0.001/50
C101B	3509152130-T	CAP CE D 0.0015UF 50V K	0.0015/50
C104A	3509470130-T	CAP CE SL 47PF 50V J	47P
C122	3609104140-T	CAP MA 0.1UF 200V J	0.1/200
C113	3609563120-T	CAP MA 0.056UF 100V	0.056/100
CON101	4428595002	LW5267/LWB0640/2.5MM-02P	2P
CON102	4428596603	LOCK WAFER LW-1143-03P	3P
CON103A	4428598304	WAFER LW-0640-4P	4P
T1-2 T3A	4678699411	CNT PLUG 1P	PLUG1P
RY101	5528008200	RELAY DH24D1-0 24V (DAIICHI)	CR311

JUMP	1508400501	JUMP WIRE(0.5/52M/M)	JUMP
SUB VOLUME B'D (4005109210D)			
R81 -83	3009123973	RES CF 12K 1/5W J N	12K
VR4 -6 VR9	3228086710	VR RK16K112000153A (RMZ89)	50KA
VR7 -8	3228089410	VR RK16K116000114W (RMX30)	100KW
CON6	4355482610	CONNECTOR ASS'Y 4P	4P
CON5	4355485710	CONNECTOR ASS'Y 8P	8P
CON4A	4355485810	CONNECTOR ASS'Y 5P	5P
JUMP	1508400501	JUMP WIRE(0.5/52M/M)	JUMP
SUB CHIME/SIREN B'D (4005109240D)			
R113	3004100953	RES CF 100 1/5W FN SMA -4000	100
R114	3009332973	RES CF 3.3K 1/5W J N	3.3K
CON1B	4355486410	CONNECTOR ASS'Y 6P	6P
CHIME	4628994200	SW PUSH JPJ42 -53PH -01 JAEIL	3
SUB SPERTER SELECTOR B'D (4005109230D)			
CON0	4355486320	CONNECTOR ASS'Y TERNINAL T110	2P
CON3	4428596602	WAFER LW -1143 -02P	2P
CON1A CON2A	4428596604	LOCK WAFER LW -1143 -04P	4P
SP -A	4628984410	SW PUSH JPJ42 -33H -01 JAEIL	3
JUMP	1508400501	JUMP WIRE(0.5/52M/M)	JUMP
SUB ANT BD (4005109250D)			
CON3A	4355886615	CON ASS'Y 5P	5P
ANT1	4465998310	TERMINAL(SCREW)BOARD(4T)	ANT
PA -9200RC 4005109280			
IC108	2128640000	IC 7818 SAMSUNG	7818
CON1	4355957220	CON ASS'Y 3P 430MM B	3P
DECK LED B'D (400510927D)			
Reference	ITEM NO	DEFINE	VALUE
D36 -37	2300030100	LED LTL -1CHE LITEON	LED
R193	3009222973	RES CF 2.2K 1/5W J N	2.2K
CON6A	4428598703	CONNECTOR WAFER LA -0640 -3P	3P
SUB PAUSE S/W B'D (400510928D)			
R192	3039220472 - T	RES MO 22 1W J T	22 1W
C1A	3609223120 - T	CAP MA 0.022UF 100V J	223P100V
CON5A	4428598705	CONNECTOR WAFER LA -0640 -5P	5P
PAUSE	4628983910	SW PUSH JPA11 -22PH -01 JAEIL	SW/6P
SUBLED B'D (4005109220D)			
IC110	2118032210	IC TA7666P TOSHIBA(2281)	2281
D112 D101A D111A D103 D106 D102A D104A	2301250112	LED SLR -208 SHINYOUNG	LED

D105A D107A D108A D109A D110A			
R126A	3009224973	RES CF 220K 1/5W J N	220K
R115A R116A R117A R118A R119A R120A R121A R122A R123A R124A R125A	3009272973	RES CF 2.7K 1/5W J N	2.7K
R111A R112A R113A R114A	3009473973	RES CF 47K 1/5W J N	47K
C102A C110A	3409210071 - T	CAP AF RSG 10UF 50V 5 P	10/50
C101A	3409210971 - T	CAP AF RSG 1UF 50V 5 P	1/50
CON103	4355482510	CONNECTOR ASS'Y 5P	5P - 4P
JUMP	1508400501	JUMP WIRE(0.5/52M/M)	JUMP
SUB LCD B'D (4005109200D)			
D19	2300050100	LED LTL - 307E LITEON	LED
LCD	2338170396	LCD KXN 25840 DAN(PA - 9100RC)	LCD
CON08A CON09A	4355486012	CONNECTOR ASS'Y 17P	17P
CON08B CON09B	4428596602	WAFER LW - 1143 - 02P	2P
DOWN FM/AM M1 - 6 ON UP	4658002610	SW TACK KHH10914L0	S/W
JUMP	1508400501	JUMP WIRE(0.5/52M/M)	JUMP
MAIN B'D (40051095001)			
Q23	2008206998 - T	KTA1023 - Y - AT	KTA1023Y
Q12	2008406103 - T	TR NPN KTC 1923Y(KTC 3194)	KTC3194Y
Q22	2008407970 - T	TR NPN KTC 2SC 2235Y(KTC1027Y)	KTC1027Y
Q13	2008606101 - T	TR NPN KTC 3198LBL (732 BL)	KTC 3198BL
Q2 - 4 Q6 - 11 Q15 - 16 Q21 Q24 - 25 Q27	2008606104 - T	TR NPN KTC 3198Y	KTC 3198Y
Q1 Q19 - 20 Q26 Q28	2008606105 - T	TR PNP KTA 1266Y	KTA1266Y
Q17	2008606108 - T	TR NPN KTC2240BL (KTC 3200BL)	KTC3200BL
Q5 Q14	2008606998 - T	TR NPN KTD 1302 KEC ONLY	KTD 1302
Q18	2018211100 - T	FET N - CH 2SK 168D SANKYOELE	2SK 168D
Q29	2028406113	TR NPN KTD 2058Y (D880Y)	2SD2058
D38 - 41	2058100996	DIODE RECTIFIER LT1N4006(4007)	1N 4006
D10 - 13 D15 D18 D20 - 32 D34 - 35 D1 - 6 D42	2058304100	DIODE IN4148	1N 4148

D50-51			
D14	2058500033	DIODE ZENER UZ - 3.3B(3.1,3.5)	UZ - 3.3B
D0 D17	2058502056	DIODE ZENER UZ - 5.6BW(5.4,5.8)	UZ 5.6BM
D9	2058502082	DIODE ZENER UZ - 8.2BM(7.9,8.5)	UZ 8.2BM
D16	2058502120	DIODE ZENER UZ - 12BM(11.6,12.4)	UZ 12BM
D50A	2058502130	DIODE ZENER UZ - 13BM(12.6,13.9)	UZ 13BM
D7-8	2058819106	DIODE KV1236Z3	VARACTOR
IC102-104	2118010432	IC NJM2068DD JRC	NJM 2068DD
IC105	2118010590	IC NJM4558D JRC	NJM 4558D
IC106	2118060130	IC IFLA1265 SANYO	LA 1265
IC109	2128611100	IC KA7918 COMMON	7918
IC101	2128740208	IC BXA 4240	BXA 4240
IC107	2138013995	IC UPD1719G - 014 12	UPD1719G - 011
FB1-6	2648609900	FERITE BEAD H5B	BEAD
R212 R225 R236	3004100953	RES CF 100 1/5W FN SMA - 4000	100
R9 R23-24 R43-44 R53-54 R77 R179-180 R207 R238 R246	3009102973	RES CF 1K 1/5W J N	1K
R6 R60 R111 R157 R211 R218-219 R226 R231 R234 R237 R243-244 R250 R252-253 R255 R261 R273	3009103973	RES CF 10K 1/5W J N	10K
3J100 R7-8 R25-26 R63 R66 R84 R190 R260	3009104973	RES CF 100K 1/5W J N	100K
R4 R228	3009105973	RES CF 1M 1/5W J N	1M
R41-42 R51-52	3009122973	RES CF 1.2K 1/5W J N	1.2K
R12-14 R29-31 R47 R59 R102 R216	3009123973	RES CF 12K 1/5W J N	12K
R80	3009150973	RES CF 15 1/5W J N	15
R151	3009151973	RES CF 150 1/5W J N	150
R78 R154 R161	3009152973	RES CF 1.5K 1/5W J N	1.5K
R1 R174 R229	3009153973	RES CF 15K 1/5W J N	15K
R153	3009154973	RES CF 150K 1/5W J N	150K
R103 R158 R176	3009155973	RES CF 1.5M 1/5W J N	1.5M
R271	3009182973	RES CF 1.8K 1/5W J N	1.8K
R184 R187 R303	3009183973	RES CF 18K 1/5W J N	18K


R11	3009202973	RES CF 2K 1/5W J N	2K
R61 -62 R249	3009221973	RES CF 220 1/5W J N	220
R21 -22 R227 R232 R235 R267 R270	3009222973	RES CF 2.2K 1/5W J N	2.2K
R213 -214 R222 R224	3009223973	RES CF 22K 1/5W J N	22K
R155	3009224973	RES CF 220K 1/5W J N	220K
R106 R163	3009225973	RES CF 2.2M 1/5W J N	2.2M
R64	3009270973	RES CF 27 1/5W J N	27
R256	3009272973	RES CF 2.7K 1/5W J N	2.7K
R2	3009273973	RES CF 27K 1/5W J N	27K
R5	3009274973	RES CF 270K 1/5W J N	270K
R262	3009302973	RES CF 3K 1/5W J N	3K
R208	3009331973	RES CF 330 1/5W J N	330
R152 R156 R160 R162 R205 R210	3009332973	RES CF 3.3K 1/5W J N	3.3K
R165	3009333973	RES CF 33K 1/5W J N	33K
R108	3009334973	RES CF 330K 1/5W J N	330K
R104	3009391973	RES CF 390 1/5W J N	390
R65 R217	3009392973	RES CF 3.9K 1/5W J N	3.9K
R107 R223	3009393973	RES CF 39K 1/5W J N	39K
R27 -28 R57 -58 R170 -172 R177 -178 R181 -182 R248	3009471973	RES CF 470 1/5W J N	470
R183 R189 R240 R242 R268 -269 R230	3009472973	RES CF 4.7K 1/5W J N	4.7K
R230(for PA-9100RC)	3009562973	RES CF 5.6K 1/5W J N	5.6K
R105 R110 R159 R173 R241 R245 R258 R272	3009473973	RES CF 47K 1/5W J N	47K
R206 R209	3009561973	RES CF 560 1/5W J N	560
R3 R301 R301(for PA-9100RC)	3009562973 1508400501	RES CF 5.6K 1/5W J N JUMP WIRE(0.5/52M/M)	5.6K JUMP
R109 R112	3009563973	RES CF 56K 1/5W J N	56K
R203 -204	3009680973	RES CF 68 1/5W J N	68
R201	3009682973	RES CF 6.8K 1/5W J N	6.8K
R215 R221	3009683973	RES CF 68K 1/5W J N	68K
R164	3009684973	RES CF 680K 1/5W J N	680K
R186 R202 R220	3009752973	RES CF 7.5K 1/5W J N	7.5K

R239	3009820973	RES CF 82 1/5W J N	82
R185	3009822973	RES CF 8.2K 1/5W J N	8.2K
R45-46 R55-56 R175	3009823973	RES CF 82K 1/5W J N	82K
R190A	3039100575 - T	RES MO 10 2W JR	10 2W
R259	3039101575 - T	RES MO 100 2W	100 2W
R254	3039102472 - T	RES MO 1K 1W J T	1K 1W
R191	3039151575 - T	RES MO 150 2W J RADIAL	150 2W
R188	3039220472 - T	RES MO 22 1W J T	22 1W
R10	3039561575 - T	RES MO 560 2W J RADIAL	560 2W
VR1-3	3228086710	VR RK16K112000153A (RMZ89)	50KA
VR10	3238082610	VR RV09A-20-20K-C24 ALPHA	20KC
C217A	3248347320 - T	RES SEMI 47K N6L25T1N	SEM473
C69 C211 C215 C237 C273	3409210071 - T	CAP AF RSG 10UF 50V 5 P	10/50
C66 C154	3409210141 - T	CAP AF RSG 100UF 25V 6 P	100/25
C26 C46 C56 C64 C102 C104 C171 C174-175 C177	3409210971 - T	CAP AF RSG 1UF 50V 5 P	1/50
C187	3409222141 - T	CAP AF RSG 220UF 25V J 8 P	220/25
C7 C240	3409222971 - T	CAP AF RSG 2.2UF 50V 5 P	2.2/50
C152-153 C181 C186	3409233071 - T	CAP AF RSG 33UF 50V 6 P	33/50
C226-227	3409233147 - T	CAP SD 330UF 25V 8P	330/25
C220	3409233971 - T	CAP AF RSG 3.3UF 50V 5 P	3.3/50
C8 C27-28 C57-58 C101 C108 C172 C178-179 C222 C228 C28A	3409247041 - T	CAP AF RSG 47UF 25V 5 P	47/25
C151 C224	3409247137 - T	CAP SD 470UF 16V 8P	470/16
C4 C6 C43-44 C53-54 C68 C219 C241 C250	3409247971 - T	CAP AF RSG 4.7UF 50V 5 P	4.7/50
C23-24 C208	3409247972 - T	CAP AF RSS 4.7UF 50V 5 P	4.7/50
C21-22 C41-42 C51-52 C59 C223 C225	3509102530 - T	CAP CE B 0.001UF 50V J	0.001/50
C221	3509103530 - T	CAP CE F 0.01UF 50V Z	0.01/50
C236	3509220130 - T	CAP CE SL 22PF 50V J	22P
C207	3509221130 - T	CAP CE SL 220PF 50V J	220P50

C202-203 C210 C213 C229-232 C234 C310	3509223530-T	CAP CE F 0.022UF 50V Z	0.022/50
C173 C176	3509309030-T	CAP CE SL 3PF 50V C	3P
C214	3509330130-T	CAP CE SL 33PF 50V J	33P
C103 C185	3509470130-T	CAP CE SL 47PF 50V J	47P
C204 C210A	3509473530-T	CAP CE F 0.047UF 50V Z	0.047/50
C180	3509509030-T	CAP CE SL 5PF 50V J	5P
C61-62	3509562530-T	CAP CE F 0.0056UF 50V Z	0.0056/50
C25 C45 C55	3509680130-T	CAP CE SL 68PF 50V J	68P
C235	3509809030-T	CAP CE SL 8PF 50V C	8P
C63 C217	3609102120-T	CAP MA 0.001UF 100V	0.001/100
C106 C205	3609103120-T	CAP MA 0.01UF 100V	0.01/100
C107	3609104122-T	CAP MA 0.1UF 100V J SMALL	0.1/100
C105	3609104122-T	CAP MA 0.1UF 100V J SMALL	0.1/100
C182	3609122120-T	CAP MA 0.0012UF 100V J	0.0012/100
C2-3 C67	3609153120-T	CAP MA 0.015UF 100V J	0.015/100
C1 C155 C157 C216	3609223120-T	CAP MA 0.022UF 100V J	0.022/100
C156	3609273120-T	CAP MA 0.027UF 100V J	0.027/100
C183-184	3609333120-T	CAP MA 0.033UF 100V J	0.033/100
C158	3609472120-T	CAP MA 0.0047UF 100V J	0.0047/100
C218	3609563120-T	CAP MA 0.056UF 100V	0.056/100
C206	3609682120-T	CAF MA 0.0068UF 100V J	0.0068/100
C206(for PA-9100RC)	3609563120-T	CAP MA 0.056UF 100V	0.056/100
C209	3619471110	CAP PL 470PF 50V J	470P50V
TM1	3838001000	TRIMMER VC TZ03T110F	TRIM10P
TM2	3838099610	TRIMMER TZ03R200FR	TRIM20P
CF3	3908001150	FILTER SFE 450B	450B
CF1-2	3908011001	FILTER SK107M3-AO-20	SKM3B
X-TAL	3908101050	CRYSTAL 4.5MHZ	4.5MHZ
IC1	3928110950	FRONT END F-3630VB	F-3930VB
CON7	4428596603	LOCK WAFER LW-1143-03P	3P
CON2 CON50 CON5B	4428598303	CONNECTOR WAFER LW-0640-3P	3P
CON08A2 CON09B2 CON4 CON101B	4428598304	WAFER LW-0640-4P	4P
CON10	4428598305	CONNECTOR WAFER LW-0640-5P	5P
CON10A	4428598308	CONNECTOR WAFER LW-0640-8P	8P
CON08A1	4428598315	CONNECTOR WAFER LW-0640-15P	15P

CON09B1			
PHONE4 - 6 PHONE2 - 3	4438097320	BOARD PHONE JACK(ST) MPA - 95	PHONEJACK4P
PHONE1	4438099710	JACK HTJ 064 - 03B	PHONEJACK9P
JUMP	1508400501	JUMP WIRE(0.5/52M/M)	JUMP
CON101A CON13 CON11 - 12 CON14 CON16 CON12A CON6B	4428595002	LW5267/LWB0640/2.5MM - 02P	2P
C195 - 196			470/50
F4			
T1A			
T2A			
T3			
T5			
ASS'Y			
AC INLET	4448996910 4448997110	AC INLET BACI - 05 - E1A (BELTON) AC INLET NO.KE - 10.2100.151	,D ,E C R
FUSE	5508222830 5508222833 5508412834	FUSE NB 31.8MM 2.5A/250V KS FUSE NB 31.8MM 2.5A/250V U/C FUSE 218T 20MM 2.5A/250V UCSKJ	D E C R
FUSE(for PA - 9100RC)	5508412634 5508222533 5508222933	FUSE 218T 20MM 1.6A/250V UCSKJ FUSE NB 31.8MM 1.5A/250V U/C FUSE NB 31.8MM 3A/250V U/C	C R D E
FUSE DRAWER	4448996911 4448997120	FUSE DRAWER(31.8MM) FUSE DRAWER NO.4305.0001(20MM)	,D ,E C R
FUSE DRAWER (for PA - 9100RC)	4448997120 4448996911	FUSE DRAWER NO.4305.0001(20MM) FUSE DRAWER(31.8MM)	C R D
OPT	2818093400	TRANSFORMER OUTPUT PA - 9200RC	TRANS
OPT(for PA - 9100RC)	2818092900	TRANS POWER OUTPUT PA - 9100RC	TRANS
PT	2828085800	TRANSFORMER POWER PA - 9200RC	TRANS
PT(for PA - 9100RC)	2828085900	TRANSFORMER POWER PA - 9100RC	TRANS
SW	4628993310	SW POWER(ESB - 99888V)	SW
SW(for PA - 9100RC)	4628992310	SWITCH POWER PS3 - 22 - W3AZ	SW

COMPANY	INTER.M	APPLICANT	REVISED NUMBER AND DATE	5	DRAWN	CHECKED	APPROVED	NOTE
TYPE CODE			4. 1. 1.	7.				
APPROVED DATE	03.07.21		5. 1. 1.	8.				

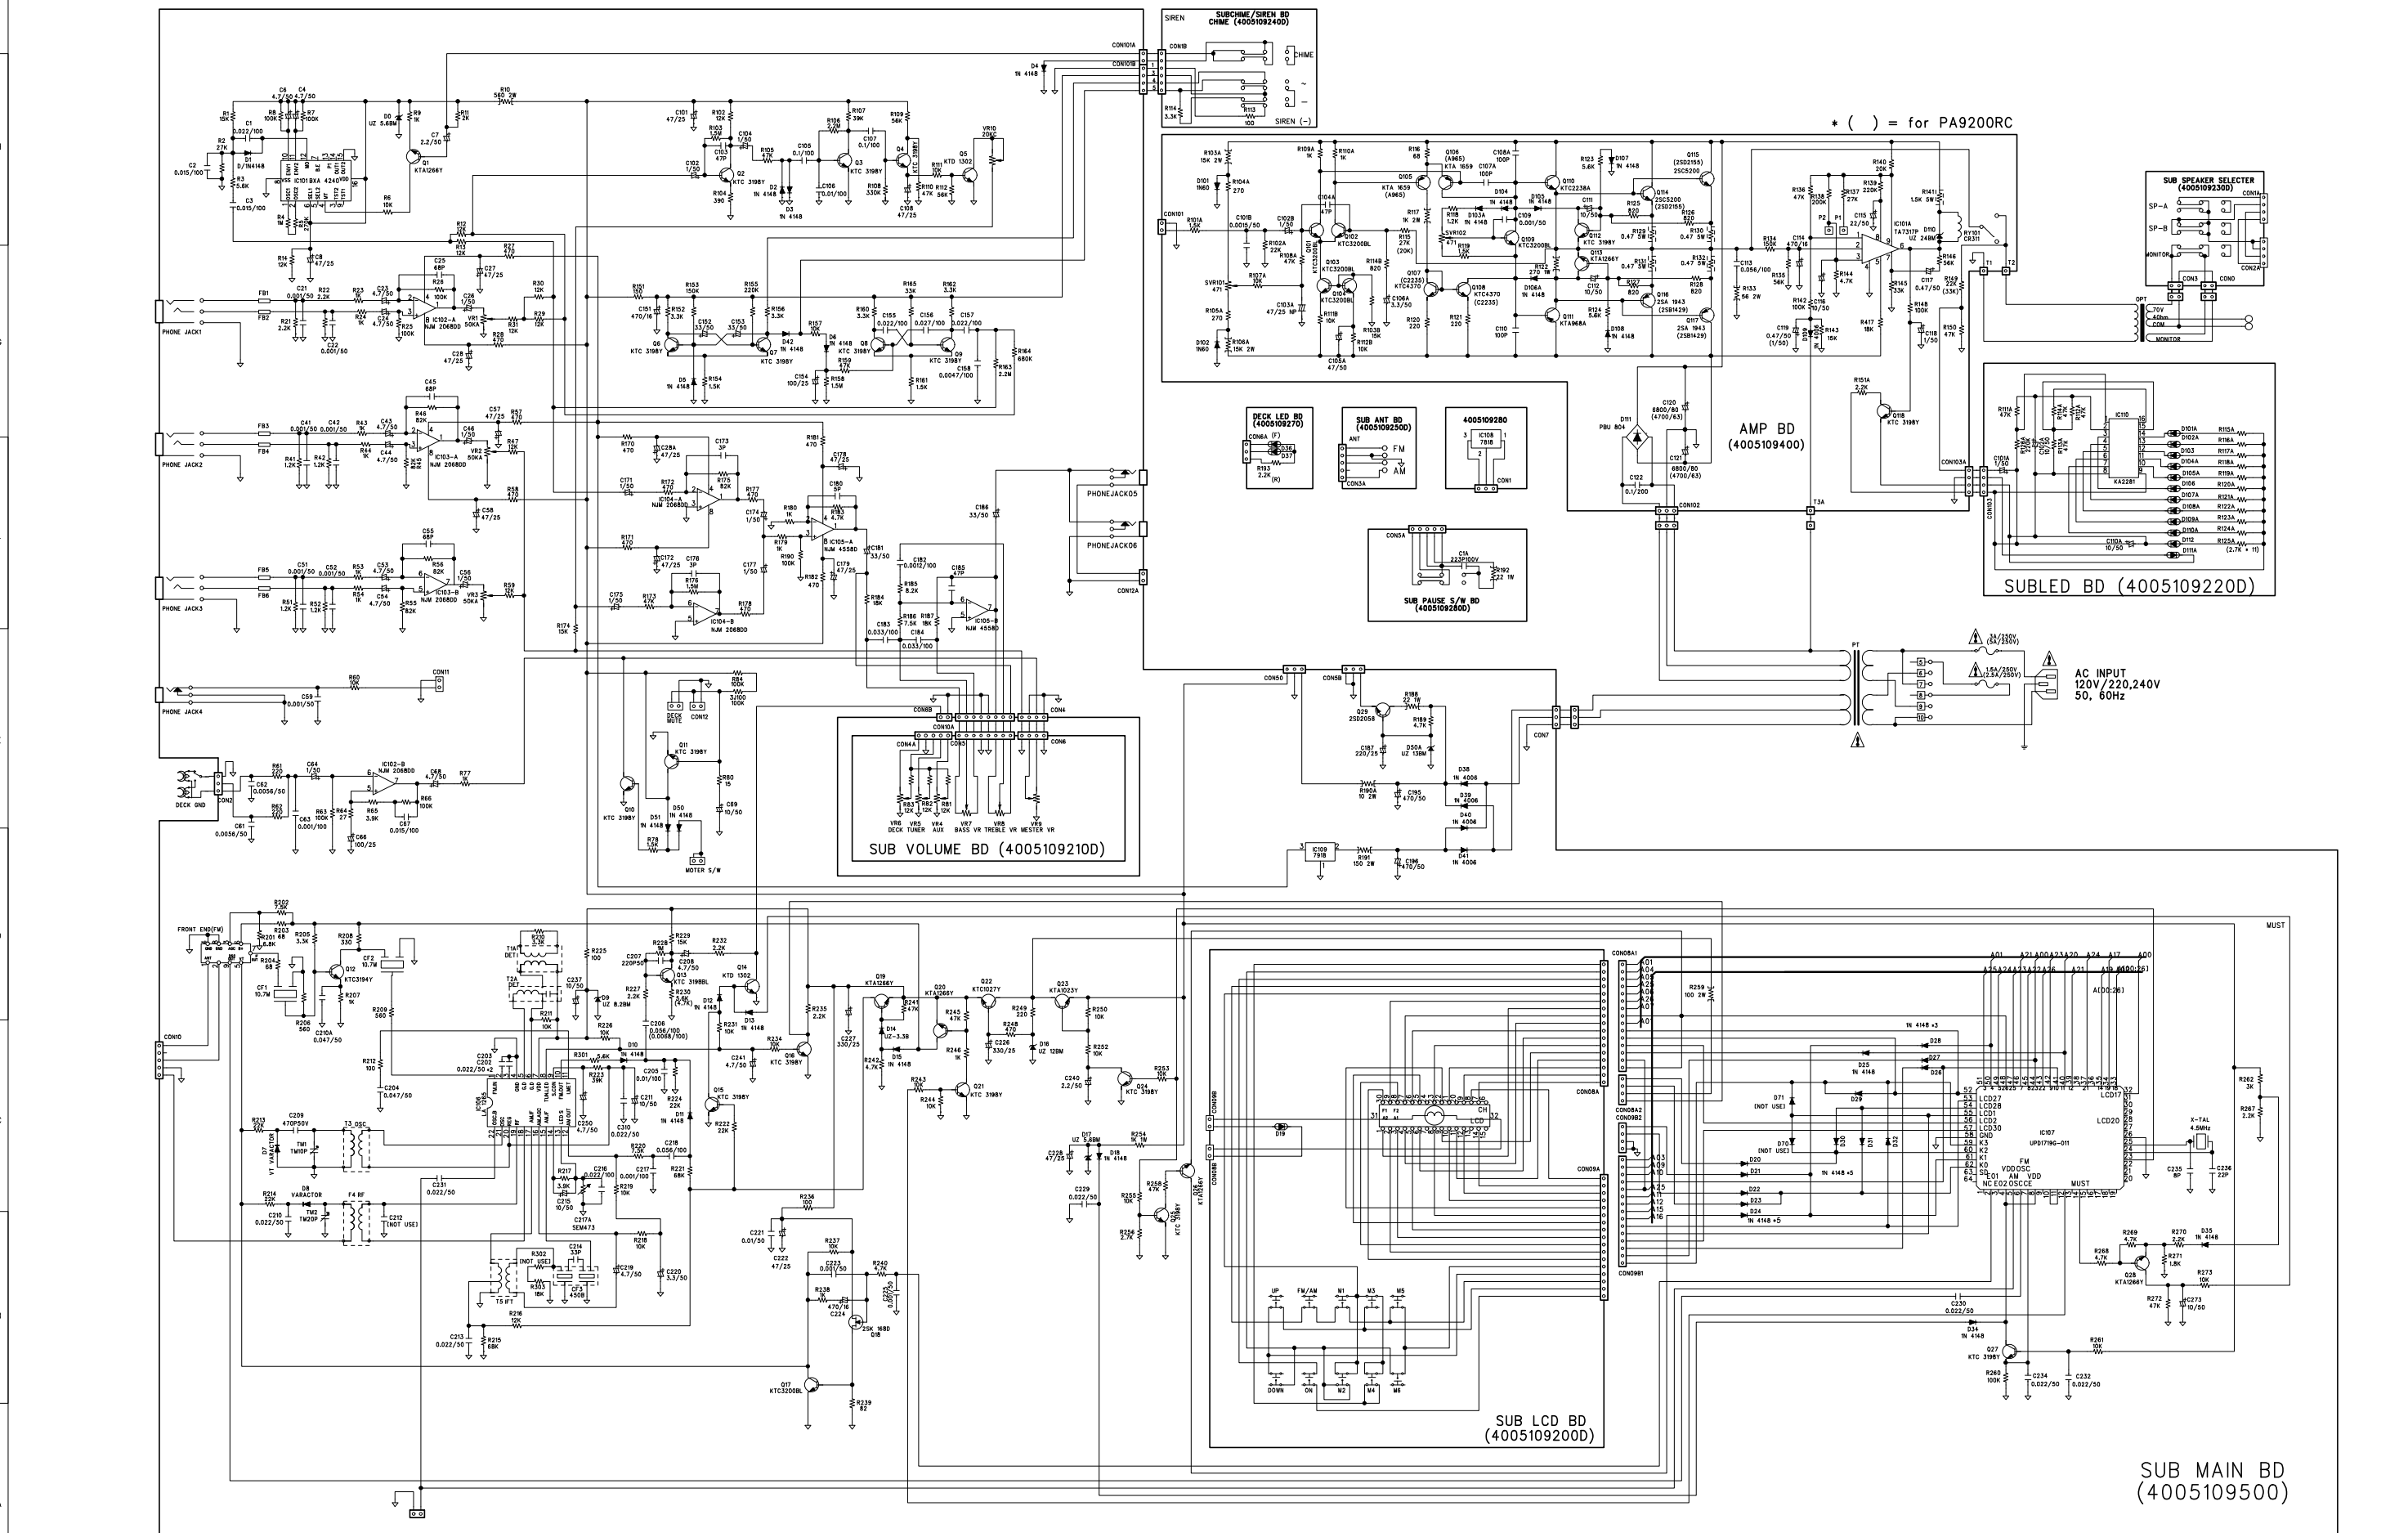

* () = for PA9200RC

SUB MAIN BD (4005109500)

SUB LCD BD (4005109200D)

AMP BD (4005109400)

SUB VOLUME BD (4005109210D)

SUB ANT BD (40051092500)

SUB PAUSE S/W BD (40051092800)

SUB SPEAKER SELECTOR (40051092300D)

SUBLED BD (4005109220D)

DECK LED BD (40051092700)

SUBCHIME/SIREN BD (40051092400)

AC INPUT 120V/220,240V 50, 60Hz